


HALOGEN-FREE CABLE

0,6/1kV

RZ1-K (AS)

USES

The halogen-free RZ1-K (AS) cable is a high security cable. It does not emit toxic substances or corrosive gases in case of fire, therefore protecting public health and preventing possible damage to electronic equipment. This is why its use is recommended for domestic installations and required in public places such as: shops, waiting rooms, offices, etc.



CHARACTERISTICS



USES



CERTIFICATIONS




B2_{ca} s1a, d1, a1
C_{ca} s1a, d1, a1

DESIGN

[1] CONDUCTOR	Electrolytic copper, class 5 (flexible) according to EN 60228.
[2] INSULATION	Cross-linked polyethylene (XLPE).
[3] SHEATH	Flame-resistant polyolefin, halogen-free and with low fume and corrosive gas emission in case of fire. Green colour.

TECHNICAL DATA

CROSS SECTION [mm ²]	SHEATH/INSULATION COLOUR	DIAMETER [mm]	WEIGHT [kg/km]	TUBING	Voltage Drop V/A · Km
3G1,5	● / ●●●	9,1	115,5	26	34,0
3G2,5	● / ●●●	10,1	153,4	36	20,4

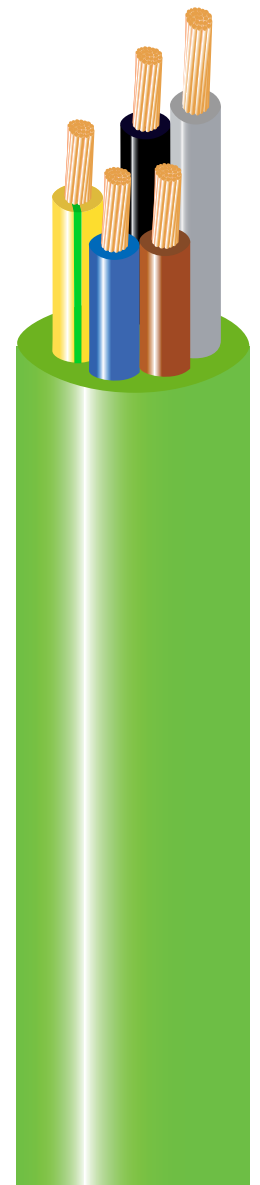

Reference regulations
IEC 60502 - UNE 21123

UNE-EN 60332-1 / UNE-EN 50266 /
UNE-EN 50267-1 / UNE-EN 50267-2 /
UNE-EN 61034

IEC 60332-1 / IEC 60332-3 / IEC
60754-1 / IEC 60754-2 / IEC 61034

ITC-BT: 9/14/15/20/28/ 30

>> **BLISTER - SUPPLY CONDITIONS**

SECTION [mm ²]	INSULATION COLOUR	Type	Capacity (m)	CODE	EAN CODE	MINIMUM ORDER	PRICE RATE
3G1,5	●	B	10	3203001MRBR010	8428722216530	10	
3G1,5	●	B	25	3203001MRBR025	8428722206005	1	
3G2,5	●	B	10	3203002MRBR010	8428722216547	8	
3G2,5	●	B	25	3203002MRBR025	8428722206012	1	

