


DECO-TEXTIL CABLE

H03VV-F / H05VV-F

USES

Decorative cable for powering electrical appliances in homes and offices. Small mechanical loads for the H03VV-F cable, such as radios, table lamps, hanging lamps, and office equipment. Medium mechanical loads for the H05VV-F cable.



CHARACTERISTICS



USES



CERTIFICATIONS




DESIGN

- [1] CONDUCTOR Electrolytic copper, class 5 according to EN 60228.
- [2] INSULATION PVC.
- [3] SHEATH Flexible PVC, black or white colours + textil colored braid.

TECHNICAL DATA

CROSS SECTION [mm ²]	INSULATION COLOUR	DIAMETER [mm]	WEIGHT [kg/km]	INTENSITY (A)	Cable
2x0,75		5,5	44,4	3	H03VV-F

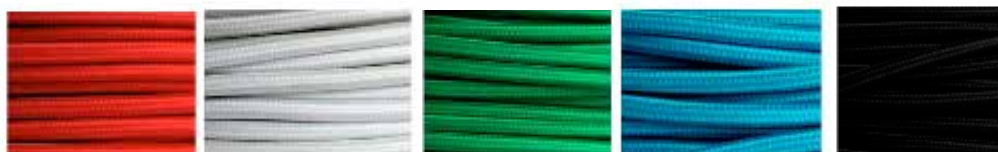

RED WHITE GREEN BLUE BLACK

Others colours could be available

Reference regulations
UNE-21031-5

>> **BLISTER - SUPPLY CONDITIONS**

SECTION [mm ²]	INSULATION COLOUR	Type	Capacity (m)	CODE	EAN CODE	MINIMUM ORDER	PRICE RATE
2x0,75	●	A	5	092N000STXRBR05	8428722216394	10	
2x0,75	●	A	5	092R000STXRBR05	8428722216417	10	
2x0,75	●	A	5	092D000STXRBR05	8428722216400	10	
2x0,75	○	A	5	092B000STXRBR05	8428722216424	10	
2x0,75	●	A	5	092W000STXRBR05	8428722216431	10	
2x0,75	●	A	5	092A000STXRBR05	8428722216387	10	

